

**KEY - PLATEAU DRAINAGE**


— MAIN SPINE DITCH  
 - - - BRANCH DITCH  
 N.B. SEE DRG. NO. P329/8 FOR DITCH DETAILS

**Key (Existing)**

— RISING MAIN  
 - - - FOUL SEWER  
 - - - S. W. SEWER  
 - - - FENCE  
 ○ T B.T. POLE / CABLE

**Key (Proposed)**

— S.W. SEWER  
 - - - LAND DRAIN  
 ■ CP1 CATCH PIT  
 ○ MHS1 S.W. MANHOLE  
 [Hatched] AREA OF PLATEAU TO BE CAPPED WITH MIN. 75mm OF TYPE 1 GRANULAR MATERIAL  
 [Dotted] LANDSCAPED AREA

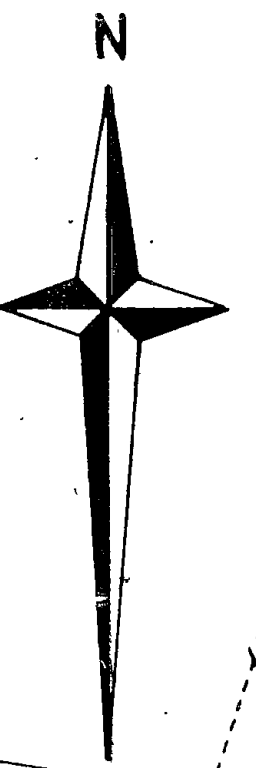

APPROX. POSITION OF RISING MAIN FROM SEWAGE PUMPING STATION.  
 EXISTING SEWAGE PUMPING STATION.  
 EXISTING SEWAGE TREATMENT WORKS.

DEVELOPMENT AREA No. 8  
 17 ACRE SITE

APPROX. POSITION OF NATIONAL PARK BOUNDARY.

LAND DRAIN DIVERSION TO AVOID WATER MAIN - DEVIATION TO BE TAKEN UP USING 15° BENDS SUITABLY SPACED.

**NOTES**

1	ALL BANKS TO BE NOT STEEPER THAN 1 IN 2 - TO HAVE 150mm MIN. TOPSOIL THICKNESS AND TO BE CHIGUANA GRASS SEEDED.	
2	BLOCKSTONE TO BE PLACED ACROSS ROAD TO PREVENT UNAUTHORISED VEHICULAR ACCESS.	
3	PLATEAU TO HAVE 25mm MIN. TOPSOIL THICKNESS AND TO BE CHIGUANA GRASS SEEDED.	
4	EXACT LOCATION OF W.W. SLUDGE MAIN TO BE ASCERTAINED PRIOR TO COMMENCEMENT OF EARTHWORKS.	
01 FEB. 95	VISIBILITY SPLAY & NOTE 6 ADDED	02
24 NOV. 95	ISSUED FOR CONSTRUCTION	
22 OCT. 95	SECURITY BANK/DITCH REPOSITIONED CLEAR OF EXISTING W.W. SLUDGE MAIN AND M.H.FH7 DITCH CONNECTION TO STREAM AND ROAD CROSSING ADDED. EXISTING ROAD HAMMER-HEAD ADDED IN NINTH AVENUE. LANDSCAPING AREAS AMENDED TO AVOID SEWERS ETC. PLATEAU LOWERED BY 100mm.	01
19 SEP. 95	ISSUED FOR TENDER	
18 SEP. 95	LANDSCAPING ADDED	E
21 AUG. 95	TEMP. CONST. OF BUND AND DITCH AROUND PLATEAU PERIMETER ADDED. SECTION A-A AND NOTES 2 & 3 ADDED.	D
15 AUG. 95	M.H.S2 REPOSITIONED. 2 NO. GULLIES ADDED	C
20 JUL. 95	MIN. CAPPING REDUCED TO 75mm FROM 150mm ACCESS ROAD 6' DIMENSION ADDED. PEAT AND LANDSCAPED AREAS DELETED. KEY (EXISTING AND PROPOSED) AMENDED. BANKS ADDED TO SOUTH OF PROPOSED PLATEAU. NOTE 1 ADDED.	B
19 JUN. 95	PLATEAU RAISED BY 50mm. SETTING OUT DIMENSIONS ADDED. CROSS SECTION LOCATIONS ADDED. PLATEAU EXTENDED TO ROAD. LAND DRAIN REALIGNED TO SOUTH OF SITE. - LAID IN BED OF DITCH. RENUMBERED TO SUIT. ADDITIONS TO KEY.	A

SCHEME	TYPE	PRELIM	FINAL	AMEND No.
P329		IX	3	

This drawing is the COPYRIGHT of  
**THOMAS, MORGAN & ASSOCIATES**  
 Civil & Structural Engineers  
 Quantity Surveyors  
 20 Gelliwastad Road, Pontypridd.  
 Telephone No. 0443-403391

Scale:- 1/1000 1/200

DRAWN	TRACED	CHECKED	APPROVED	DATE
-------	--------	---------	----------	------

WELSH DEVELOPMENT AGENCY  
 HIRWAUN INDUSTRIAL ESTATE  
 REVIEW OF 17 ACRE SITE.

**LOCATION PLAN  
 DEVELOPMENT PLATEAU**

5 JULY 96	1.5m HIGH BUND & DITCH AND SECTION A-A DELETED. LANDSCAPING AND PLATEAU DRAINAGE AMENDED NOTE 4 AMENDED.	05
10 MAY 96	PLATEAU DRAINAGE ADDED	04
16 MAR. 96	LAND DRAIN DIVERTED TO AVOID WATER MAIN - CP4 ADDED	03

5 FOR DETAILS IN AREA OF ROAD ACCESS SEEDRG. NO. P329/13

6 CROSS HATCHING INDICATES 4.5m x 10m VISIBILITY SPLAY - NO PLANTING SIGNS ETC. TO EXCEED 0.6m HEIGHT ABOVE ADJACENT ROAD LEVELS.