



1 - NORTH ELEVATION

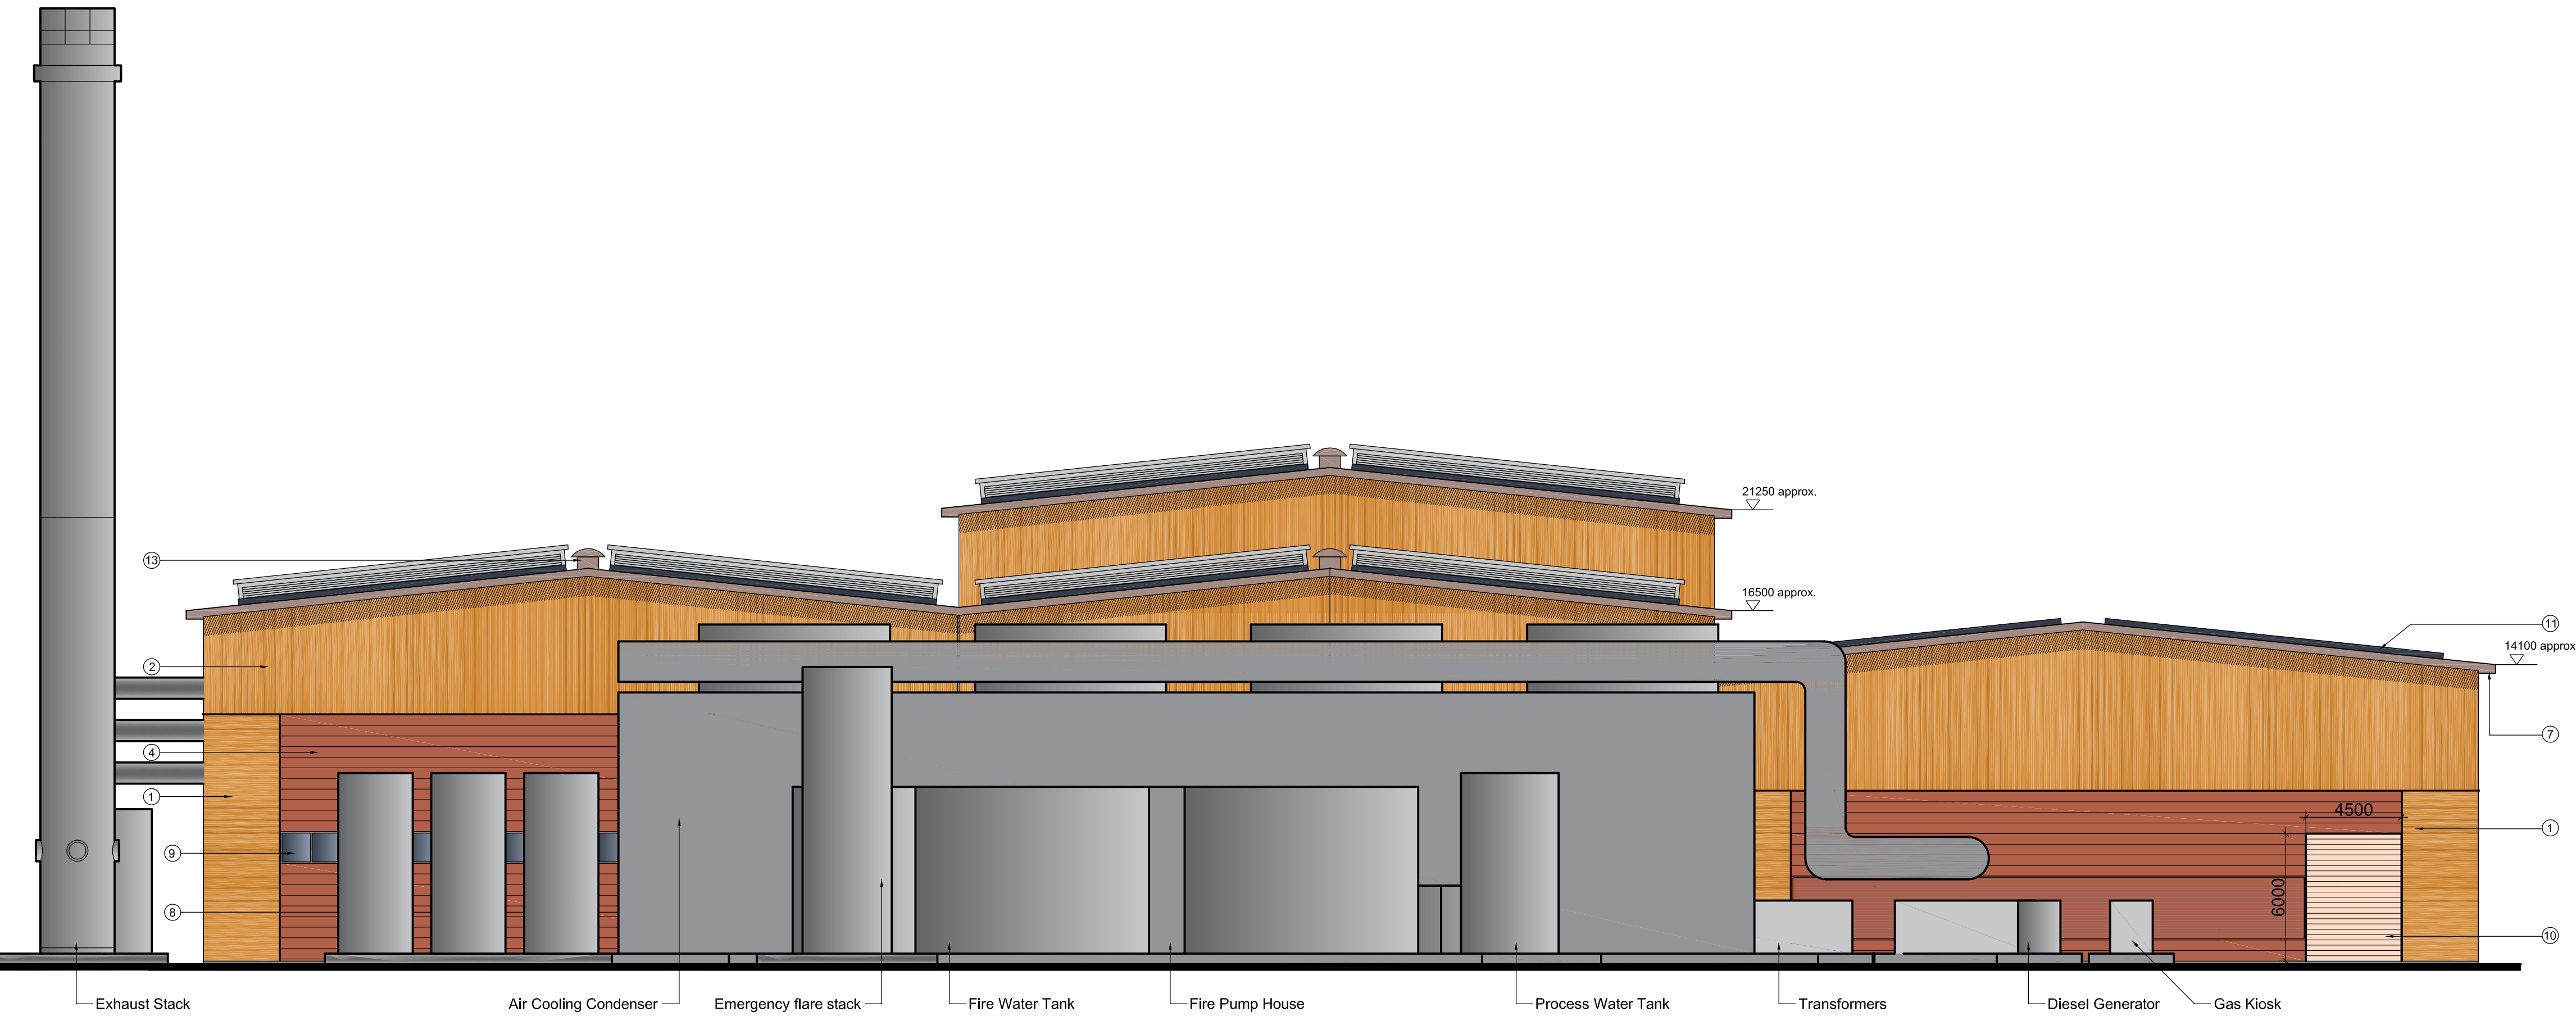

2 - WEST ELEVATION

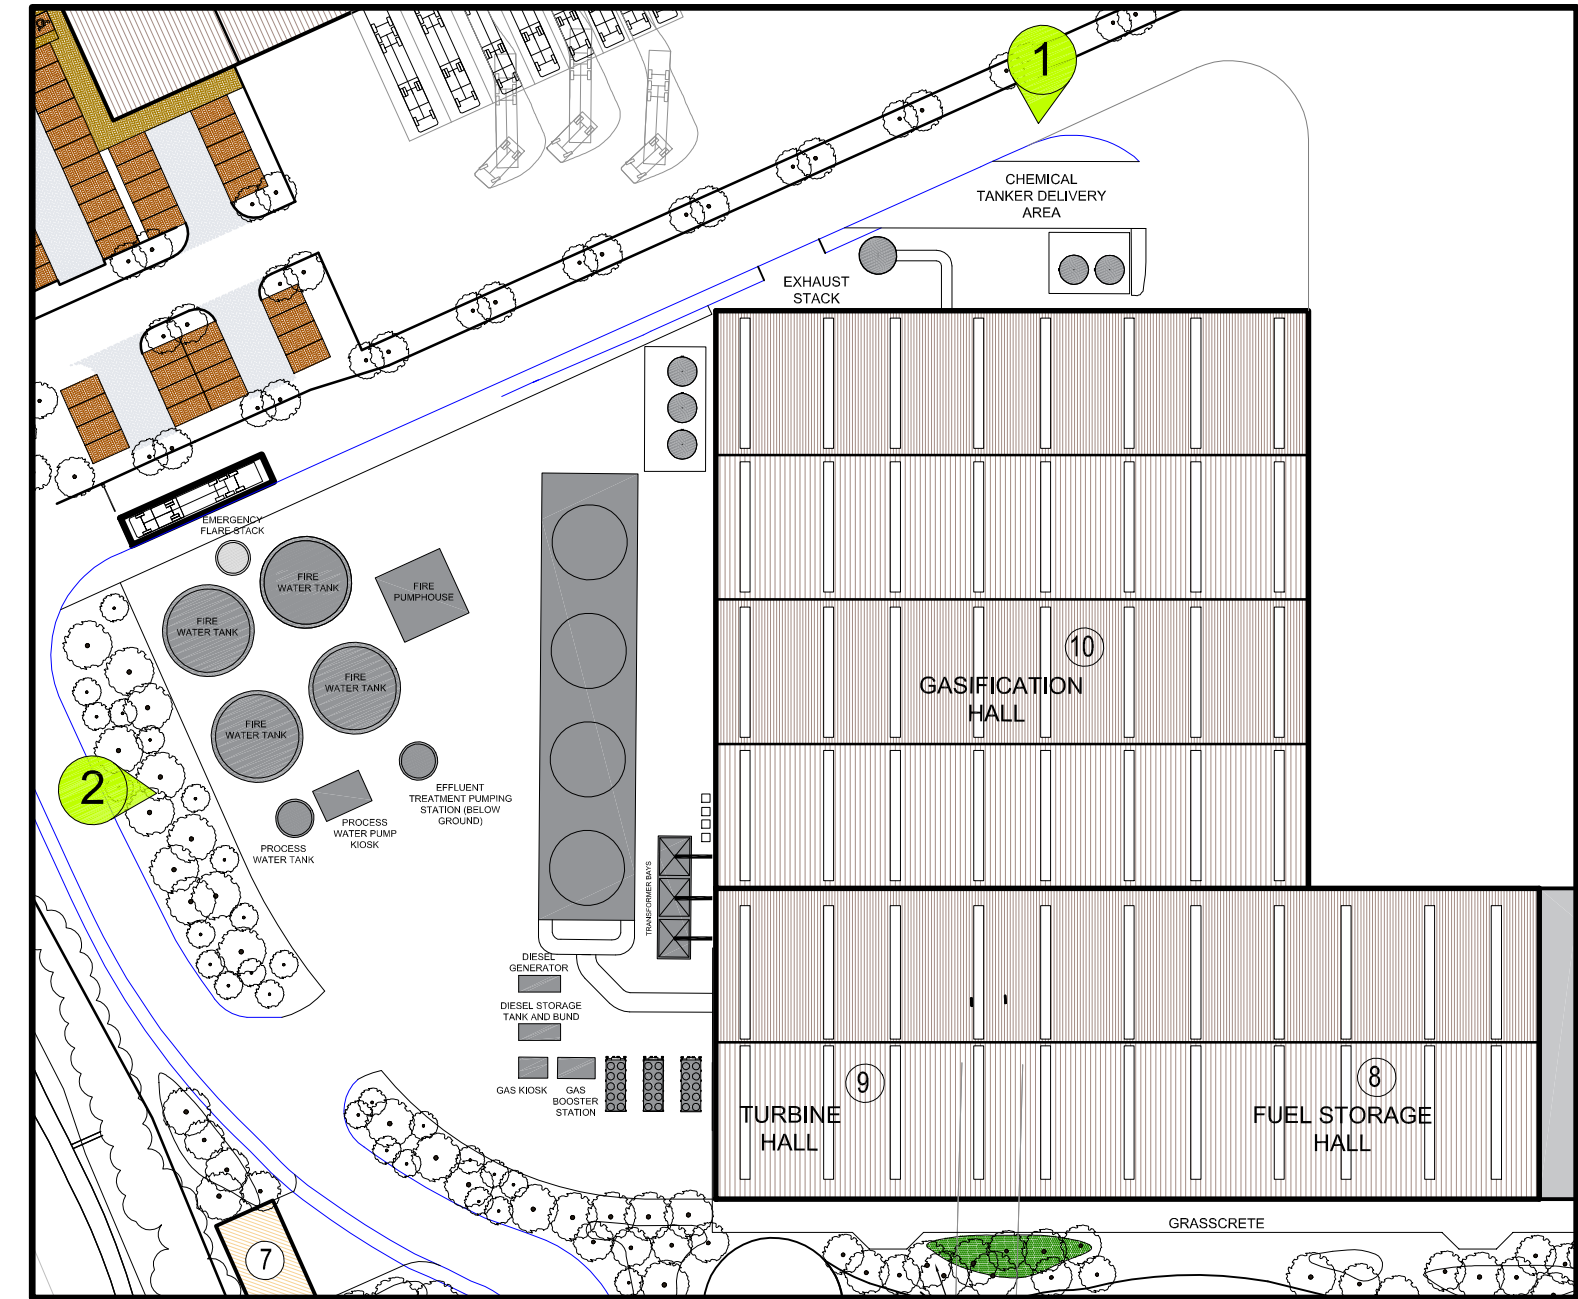

KEY PLAN -NOT TO SCALE

ALL DIMENSIONS TO BE CHECKED ON SITE.
DO NOT SCALE THIS DRAWING.
ALL DISCREPANCIES TO BE REPORTED IMMEDIATELY.
© COPYRIGHT

GENERAL NOTES

Materials, finish and colours of ALL elements of the external envelope including barrel vault rooflights and vehicle access doors are ALL to match FPA phase 1 building.

All high / low level vents & roof ventilation cowl TBC

KEY
1. Horizontal cedar boarding (VT 2565 profile) fixed back to a composite steel panel system

2. Vertical cedar boarding (VT 2565 profile) fixed back to a composite steel panel system

3. Microrib composite cladding system. Colour: Mushroom (BS 10 B 19)

4. Horizontal trapezoidal composite cladding system. Colour: Copper Beech

5. Standing seam roofing system. Colour: Dark Grey 7006S

6. Polyester powder coated aluminium RWPs. Colour: Dark Grey

7. Colour coated metal profiled fascia & soffit cladding with horizontal pressed drip flashings at Wall Type junctions. Colour: Dark Grey

8. Polyester powder coated steel personnel door. Colour: Dark Grey

9. Polyester powder coated steel vehicle access door. Colour: Mushroom Grey

10. Triple skin polycarbonate barrel vault roof lights

11. Louvers / false louver features to M&E design and specification - details and finishes TBC

12. Roof ventilators to M&E design and specification - details and finishes TBC

P4 Elevations updated & emergency flare stack added 15/09/17 DJS

P3 Elevations updated & plant locations following client meeting dated 09/02/17 22/02/17 DJS

P2 Service yard plant co-ordinated with RVW drawings dated 10/01/17 11/01/17 DJS

P1 Issue For Planning 19/12/16 DJS

No.	Revision Description	Date	By
-----	----------------------	------	----



PROJECT
Enviroparks, Hirwaun Ind Est
Gasification Hall

TITLE
Gasification Hall Building
Proposed Plant Elevations

Drawn : DJS Date : 19/12/16 Checked : MT

Scale : Original sheet size :
1:200 A1

DRAWING STATUS
☒ Planning
☐ Tender
☐ Design Development Pre-Construction
☐ Construction
☐ Record

Drawing No Revision

ENV_EPT_GEN_DR_A_6015 P4

